

To	L	_	-4	0-	nte	
12	nı		nτ	I.n	nte	птс




TD2 Series Time Delay Relay

Product Facts

• Qualified to:

MIL-PRF-83726/28 MIL-PRF-83726/29 MIL-PRF-83726/30 MIL-PRF-83726/31

- Fixed delay on operate, fixed delay on release, adjustable delay on operate & adjustable delay on release
- Meets or exceeds electrostatic discharge MIL-STD-1686 Class Non-Sensitive
- Welded hermetically sealed enclosure occupies about 1 in³ (16.4 cm³)
- 10A, 2 form C (DPDT) output contacts

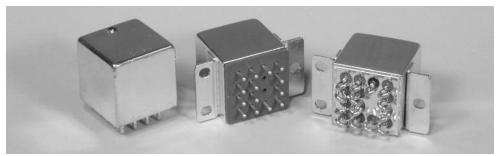

TD2 series time delay relays are available for delay on operate or delay on release operation. Either can be supplied as fixed or resistor adjustable types. Both military and commercial versions are offered.

These products consist of solid state timing circuits controlling our FCA-210 series relays, providing 2 Form C (DPDT) output contacts rated 10 amps. The internal timing circuit uses an R/C controlled oscillator with a program-

mable digital pulse counter, gating a semiconductor switch to operate the relay. Timing is independent of whether the controlling voltage is a ramp or step function.

For the adjustable models the user specifies a one decade range in seconds, within which the required delay will be set. This range is programmed internally at the time of manufacture. The required delay is obtained by calculating the oscillator timing resistor as

follows and connecting it externally to terminals 1D - 3D as below.

 $R_{EXT} = [(T_1 / T_0) - 1] 100K$ Ohms

 T_0 = Minimum time of selected decade in seconds.

T1 = Required time delay. EXAMPLE


Selected Range = 3-30 sec Required Time = 15 sec

 $R_{EXT} = [(15/3) - 1] 100K = 400K$


Timing Action and Terminal Wiring

Delay On Operate:


The time delay starts on the application of input voltage to X1-X2. The timing circuit energizes the end of the time delay period.



Fixed Model




Adjustable Model




Delay On Release:


The input voltage is continuous to X1-X2. When the control voltage is applied to C1-X2 the timing circuit and the relay are both energized. The time delay starts when the control voltage is shut off.



Fixed Model



Adjustable Model



Terminal designations shown in the diagrams above are for reference only. They do not appear on the relay header.

www.te.com



TD2 Series Time Delay Relay (Continued)

Specif	ica	tions
--------	-----	-------

Specifications						
Timing Data						
Timing Action			Delay on Opera	ate or Delay on Release		
Time Delay, Fixed – M83726/28, /29 at	Select from 0.1 to 600 sec for Commercial Models Select from 0.1 to 500 sec for Mil-Spec Models					
Time Delay, Adjustable – M83726/30,	/31 and Commercial 30C, 3	10 9	Select one decade betweer	n 0.1 to 1.0 and 60 to 60	00 seconds	
Timing Accuracy (note 1)			±10% 0	f Nominal Value		
Recycle Time (note 2)			50 ms, m	ax., to next cycle.		
Power Interrupts		Accuracy is n	ot affected by power inter	ruptions up to 1 ms spa	aced at least 10ms apart.	
Input Data						
Input Voltage			28 Vdc nomir	nal, range 20 - 32 Vdc		
Duty Rating			С	ontinuous		
Input Current			110 mA	dc Max @ 25°C		
Control Voltage (applies only to Delay	on Release type)		20) - 32 Vdc		
Control Current			15 mAdc Max (applies	only to delay on release	e types)	
Input Voltage Polarity Protection	T	he timer will be inc	perative during, and unda	maged by, reversal of the	he polarity of the input voltage.	
Output Data						
Contact Form			2 Fo	rm C (DPDT)		
Contact Material			Silver Cadmit	ım Oxide, Gold plated		
Contact Rating in Amps (Continuous D	Outy)					
Type of	Life (Min.)		115 Vac	115/200 V	ac – 3 phase	
Load	Cycles	28 Vdc	400Hz	400 Hz.	60 Hz.*	
Resistive	100 x 10 ³	10	10	10	2.5	
Inductive Motor	20 x 10 ³ 100 x 10 ³	8 4	8 4	8 4	2.5 2.0	
Lamp	100 x 10 ³	2	2	2	1.0	
* 60 Hz. loads are ra	ated at 10 x 10 ³ cycles.					
Overload Current			40 Add	c; 60A, 400 Hz.		
Rupture Current			50 Add	; 80A, 400 Hz.		
Max. Contact Drop at 10A			Initial 0.150	V; After Life 0.175V		
Electrical Data						
Electrostatic Discharge Withstand Volt	tage			16,000V		
Transients (note 3):						
Positive Transients				+80V		
Self-generated Transients			±	50V, Max.		
Spike Susceptibility			±600\	/, 10 μs, Max.		
Insulation Resistance (note 4)			1,000 megohms at 500	Vdc, between each pin a	and case	
Dielectric Strength (note 4)		1,000Vrn	ns at 60 Hz at sea level, be	tween case and all pins	connected together	
Environmental Data						
Ambient Temperature Range, Operatin	g		-55°	C to +125°C		
Altitude		80,000 feet maximum				
Shock Resistance		100 G's, 6 ms.				
Vibration Resistance, Sinusoidal		Z & Y E	Enclosure: 30 G's, 33-3000	Hz.; X & W Enclosure:	20 G's, 33-3000Hz.	
Mechanical Data						
Approximate Weight			2.5 0	z. (71g) Max.		

NOTES

- 1. The accuracy requirement applies to any combination of operating temperature and voltage. Add ±10ms for timing less than one second.
- 2. Recycle time to assure that the next timing cycle will be completed. Units can be recycled during timing and after time-out:

 Delay on operate models Power must be OFF the input at least 10 ms.

 Delay on release models Power must be ON the control terminal at least 10 ms.
- 3. Transient specifications are based on a maximum duty cycle of 1/50.

- 4. All wired terminals must be connected together during this test. Dielectric withstanding voltage and insulation resistance are measured between all mutually insulated wired terminals and between all these terminals and case.
- 5. Inductive loads must be diode suppressed.




TD2 Series Time Delay Relay (Continued)

Outline Dimensions


The standard terminal types and enclosures are illustrated below with dimensions expressed as inches ± 0.010 and (millimeters ±0.25).

Terminals

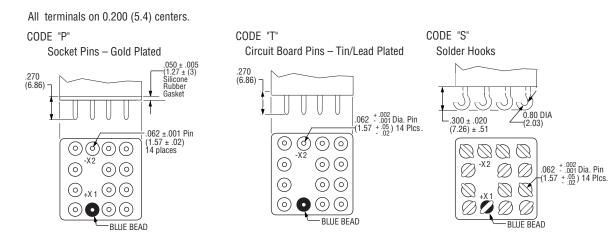

Enclosures

All Enclosures have cupro-nickel cans bright acid tin/lead plated after assembly to terminal headers.

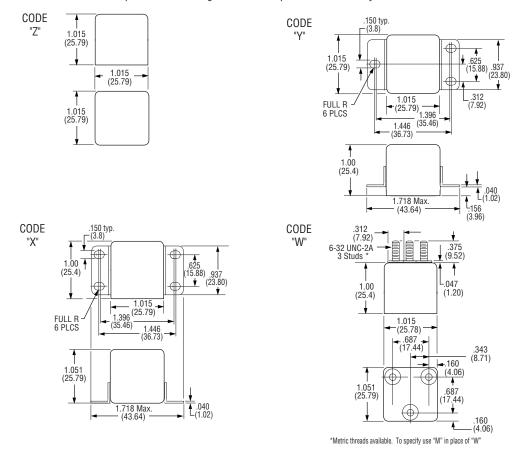

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.



TD2 Series Time Delay Relay (Continued)

P

Part Numbering System Mil-Spec Types

TD2 5002 Typical Mil-Spec Part Number 28-TD2 = Time delay relay with 2 pole, 10A output Mil-Spec Model: 28 = M83726/28 (Fixed, Delay on Operate) 29 = M83726/29 (Fixed, Delay on Release) 30 = M83726/30 (Adjustable, Delay on Operate) 31 = M83726/31 (Adjustable, Delay on Release)

Time Delay Range (Within 0.1 to 500 seconds):

For /28 and /29 types (fixed types), the delay is expressed in milliseconds in a four-digit code. The first three digits are significant. The fourth is the number of zeros following the first three.

Example: 5002 is 50 seconds.

For /30 and /31 types (adjustable types), the delay decade range is expressed in milliseconds in a four-digit code representing the upper limit of the range. The first three digits are significant. The fourth is the number of zeros following the first three.

Example: 1001 is 1 second, so the range is 0.1 to 1 second.

Terminals:

P= Socket Pin Terminals S= Solder Hook Terminals

Note: Mil-spec models have "Y" type enclosure.

Commercial Types

TD2 28C- 1001 Typical Commercial Part Number TD2 = Time delay relay with 2 pole, 10A output Commercial Model 28C = Fixed, Delay on Operate (COTS version of M83726/28) 29C = Fixed, Delay on Release (COTS version of M83726/29) 30C = Adjustable, Delay on Operate (COTS version of M83726/30) 31C = Adjustable, Delay on Release (COTS version of M83726/31) Time Delay Range (Within 0.1 to 600 seconds): For fixed types, the delay is expressed in milliseconds in a fourdigit code. The first three digits are significant. The fourth is the number of zeros following the first three. Example: 5002 is 50 seconds. For adjustable types, the delay decade range is expressed in milliseconds in a four-digit code representing the upper limit of the range. The first three digits are significant. The fourth is the number of zeros following the first three. Example: 1001 is 1 second, so the range is 0.1 to 1 second. Terminals P= Socket Pin Terminals S= Solder Hook Terminals

Enclosure

W = Mounting Studs

T= Solder Pin Terminals

X = Horizontal Flange Mount

Y = Raised Vertical Flange Mount

Z = No Mount

NOTE: Commercial versions are available with timing ranges outside of .1 to 600 sec. range.

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

For additional support numbers

please visit www.te.com



FCB-205 Series, 5 Amperes, DPDT



Product Facts

- **■** Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- **■** Permanent Magnet Drive
- Contacts rated low level to 5 Amps VDC and 115/200 VAC 400 Hz, 3 Phase
- Weight .54 ounces max. (15.4 grams)
- Qualified to M83536/1, /2

The Series FCB-205 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state.

This results in appreciably

increased contact pressure in both states over that of a spring return nonpolar design. We also manufacture other forms of the FCB relay:

FCB-405 — 5 Amp 4PDT Relay

Contact Rating — Amperes Ratings Are Continuous Duty

	Type of Load	Life (Min.) Cycles x 10 ³	28 VDC	115VAC 400Hz	115/200VAC 400Hz, 3Ø
	Resistive	100	5	5	5
·	Inductive	20	3	5	5
	Motor	100	2	3	3
	Lamp	100	1	1	1

^{*60} Hz loads rated for 10,000 operations

Low Level Switching Capability: With contacts operating a load of 10 to 50 microamperes at 10 to 50 millivolts, the contact resistance miss detection level shall be 100 ohms max. Cycling rate is 1 to 12 per second, for 100,000 operations.

Overload Current — 20 AMPS DC, 30 AMPS 400Hz

Rupture Current — 25 AMPS DC, 40 AMPS 400Hz

Contact Make Bounce —1.0 MILLISECOND AT NOMINAL VOLTAGE

Max. Contact Drop at 5 Amps — INITIAL 0.100 VOLTS

End of Life — 0.125 VOLTS

General Specifications

Temperature Rating — -70°C TO + 125°C

Altitude — 300,000 Feet

Shock* -

Z, Y, & X Enclosures —
200 g for 6 mS
W & M Enclosures (Stud Mtg.) —
100 g for 6 mS
T Enclosure (Socket Mounted in Track) —
50 g for 11 mS

Vibration, Sinusoidal* —

Z, Y, & X Enclosures —
0.12 DA 10 to 70 Hz, 30 g 70-3000Hz
W & M Enclosures (Stud Mtg.) —
0.12 DA 10 to 57 Hz, 20 g 57-3000Hz
T Enclosure (Socket Mounted in Track) —
0.06 DA 10 to 57 Hz, 10 g 57 to 500Hz,
20 g 500 to 3000 Hz

Vibration, Random* —

Z, Y, & X Enclosures — 0.4 g²/Hz 50-2000Hz T, W & M Enclosures — 0.2 g²/Hz 50-2000Hz

Dielectric Strength —

At Sea Level -

All circuits to ground and circuit to circuit — 1000 V rms
Coil to ground — 1000 V rms
At 80,000 Feet — 250 V rms

Insulation Resistance —

Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests — 50 M Ω Min.

Operate Time at Nominal Voltage — 4 ms or less Release Time at Nominal Voltage — 4 ms or less

Coil Data

Coil	Nominal Voltages	Freq.	DC Res.	Ove	Over Temperature Range		
Code		Hz	(B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)	
1	6	DC	20 Ω	4.5	0.3	2.5	
2	12	DC	95 Ω	9.0	0.75	4.5	
3	28	DC	500 Ω	18.0	1.5	7.0	
4 (A)	28	DC	500Ω	18.0	1.5	7.0	
5	48	DC	1600 Ω	36.0	2.5	14.0	

- A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.
- B. DC COIL RESISTANCE \pm 10% AT 25 $^{\circ}$ C
- C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.
- D. MAX. OVERVOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.


^{*} Max. contact opening under vibration or shock 10 microseconds



FCB-205 Series, 5 Amperes, DPDT (Continued)

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches \pm .010 and (Millimeters \pm .25).

Terminals

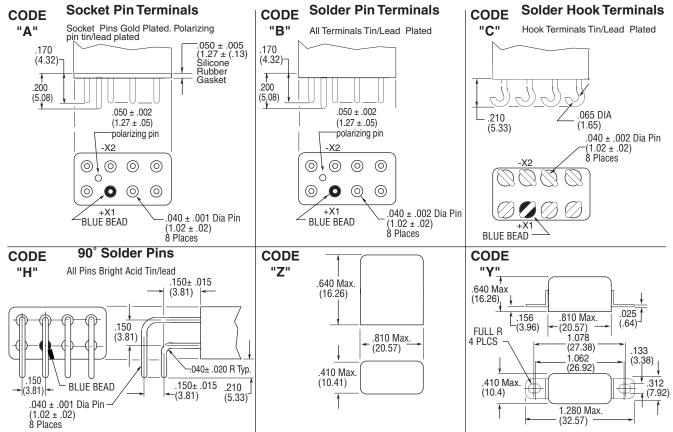


Enclosures


All Enclosures have Cupro-Nickel Cans bright acid tin/lead plated after assembly to terminal headers.

Dimensions: Inches ± .010 (mm ± .25)

Enclosure "T" is for use with track mounted sockets and requires socket pin terminals, but no gasket. The gasket is included in the socket assembly.




CODE



*Metric threads available,To specify use M in place of W

CODE "T"

M83536/2-028 (REFERENCE ONLY)



NOTE: FOR USE WITH TRACK MOUNT PER MIL-R-6106/23


** MEASURED FROM SURFACE OF HEADER




FCB-205 Series, 5 Amperes, DPDT (Continued)

Terminal Wiring

DC Coils




Transient Suppression



NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.


Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.



TERMINAL VIEW

HOW TO ORDER

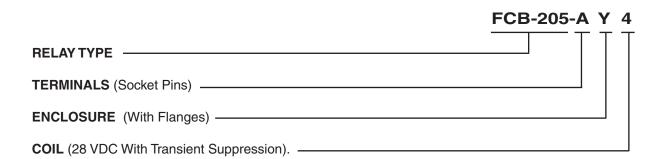

^{*} The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.



FCB-405 Series, 5 Amperes, 4PDT



Product Facts

- **■** Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- **■** Permanent Magnet Drive
- Contacts rated low level to 5 Amps 28 VDC and 115/200 VAC 400 Hz, 3 Phase
- Weight .93 ounces max. (26.4 grams)
- Qualified to M83536/5 & /6

The Series FCB-405 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state.

This results in appreciably

increased contact pressure in both states over that of a spring return nonpolar design. We also manufacture other versions of this relay:

FCB-205 — 5 Amp DPDT Relay

General Specifications Temperature Rating —

-70°C TO + 125°C

Altitude — 300,000 Feet

Shock* -

Z & Y Enclosures — 200 g for 6 mS W, X & M Enclosures — 100 g for 6 mS T Enclosure (In Track) — 50 g for 11 mS

Vibration, Sinusoidal* —

7 & Y Enclosures — 30 g 70-3000Hz W, X & M Enclosures — 20 g 70-3000Hz T Enclosure (Socket Mounted in Track) — 20 g 500-3000 Hz

Vibration, Random* —

Z & Y Enclosures — 0.4 g²/Hz 50-2000Hz T, W, X & M Enclosures — 0.2 g²/Hz 50-2000Hz

Dielectric Strength -

At Sea Level —
All circuits to ground and circuit to circuit — 1000 V rms
Coil to ground — 1000 V rms

Coil to ground — 1000 V rms At 80,000 Feet — 250 V rms

Insulation Resistance -

Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests — 50 M Ω Min.

Operate Time at Nominal Voltage — 6 ms or less

Release Time at Nominal Voltage — 6 ms or less

* Max. contact opening under vibration or shock 10 microseconds

Contact Rating — Amperes Ratings Are Continuous Duty

Type of Load	Life (Min.) Cycles x 10 ³	28 VDC	115VAC 400Hz	115/200VAC 400Hz-3Ø
Resistive	100	5	5	5
Inductive	20	3	5	5
Motor	100	2	3	3
Lamp	100	1	1	1

Low Level Switching Capability: With contacts operating a load of 10 to 50 microamperes at 10 to 50 millivolts, the contact resistance miss detection level shall be 100 ohms max. Cycling rate is 1 to 12 per second, for 100,000 operations

Overload Current — 20 AMPS DC, 30 AMPS 400Hz

Rupture Current — 25 AMPS DC, 40 AMPS 400Hz

Contact Make Bounce — 1.0 MILLISECOND AT NOMINAL VOLTAGE

Max. Contact Drop at 5 Amps — INITIAL 0.100 VOLTS

End of Life — 0.125 VOLTS

Coil Data

Cail	Nominal Voltages	F	DC Res.	Over Temperature Range		
Coil Code		Freq. Hz	(B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)
1	6	DC	25 Ω	4.5	0.3	2.5
2	12	DC	78 Ω	9.0	0.75	4.5
3	28	DC	400 Ω	18.0	1.5	7.0
4 (A)	28	DC	400 Ω	18.0	1.5	7.0
5	48	DC	1275 Ω	36.0	2.5	14.0


- A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.
- B. DC COIL RESISTANCE \pm 10% AT 25°C
- C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.
- D. MAX. OVERVOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.

www.te.com



FCB-405 Series, 5 Amperes, 4PDT (Continued)

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches \pm .010 and (Millimeters \pm .25).

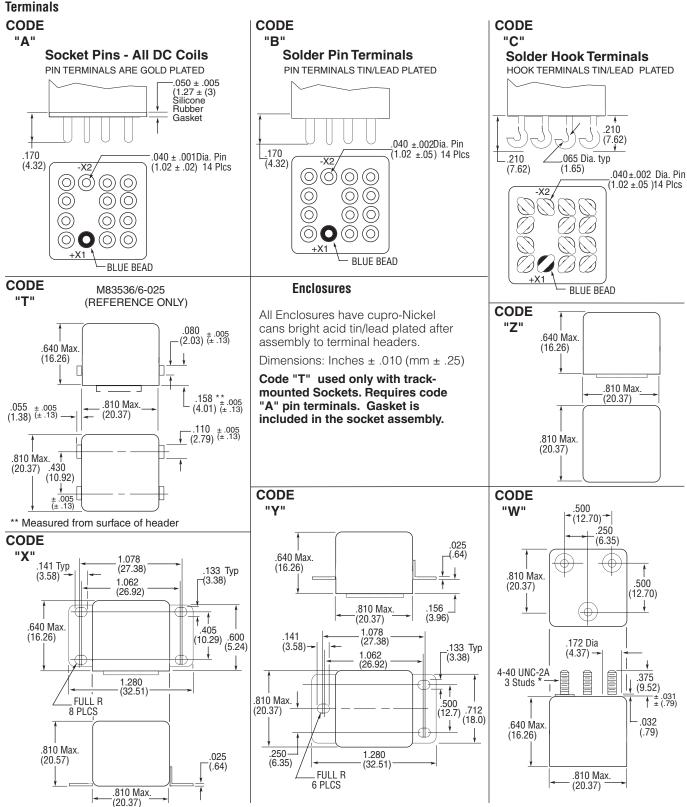


www.te.com



FCB-405 Series, 5 Amperes, 4PDT (Continued)

Terminal Wiring

DC Coils





NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.


DC Coils with Transient Suppression





TERMINAL VIEW

HOW TO ORDER

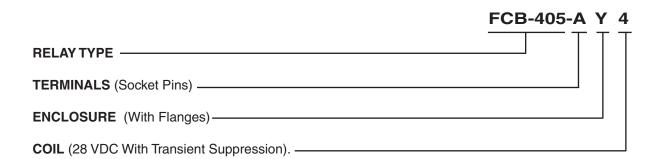

For additional support numbers

please visit www.te.com

^{*} The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.



FCA-210 Series, 10 Amperes, DPDT



Product Facts

- Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- Permanent Magnet Drive
- Contacts Silver Cadmium Oxide with Gold Plating
- Coils for DC, 50 to 400Hz and 400Hz AC
- Weight 1.6 ounces max. (45.4 grams)
- Qualified to M83536/9, /10

The Series FCA-210 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state. This results in appreciably

increased contact pressure in both states over that of a spring return nonpolar design. We also

manufacture other versions of this relay:

FCA-410 — 10 Ampere 4PDT Relay

FCA-610 — 10 Ampere 6 PDT Relay

Available:

FCA-215 — 15 Ampere DPDT Relay, Has the same specifications as the FCA-210 except is rated at 15 amps. (Commercial Only)

General Specifications

Temperature Rating — -70°C TO + 125°C

Altitude — 300,000 Feet

Shock* —

Z, Y, & X Enclosures — 200 g for 6 mS W & M Enclosures (Stud Mtg.) — 100 g for 6 mS

 ${\it Vibration, Sinusoidal*--}\\$

Z, Y, & X Enclosures — 30 g 33-3000Hz W & M Enclosures (Stud Mtg.) — 20 g 33-3000Hz

Vibration, Random* —

Z, Y, & X Enclosures — 0.4 g²/Hz 50-2000Hz W & M Enclosures (Stud Mtg.) — 0.2 g²/Hz 50-2000Hz

Dielectric Strength -

At Sea Level -

All circuits to ground and circuit to circuit — 1250 V rms Coil to ground — 1000 V rms At 80.000 Feet — 350 V rms

Insulation Resistance —

Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests — 50 M Ω Min.

Operate Time at Nominal Voltage —

DC Relays — 10 ms or less AC Relays — 15 ms or less

Release Time at Nominal Voltage —

DC Relays — 10 ms or less AC Relays — 50 ms or less

Contact Rating — Amperes Ratings Are Continuous Duty

Type of Load	Life (Min.)	28 VDC	115VAC	115/200VAC 3Ø	
Load	Cycles x 103	20 VDC	400Hz	400Hz	60Hz*
Resistive	100	10	10	10	2.5
Inductive	20	8	8	8	2.5
Motor	100	4	4	4	2.0
Lamp	100	2	2	2	1

^{*60} Hz loads rated for 10,000 operations

Overload Current — 40 AMPS DC, 60 AMPS 400Hz Rupture Current — 50 AMPS DC, 80 AMPS 400Hz

Contact Make Bounce —1 MILLISECOND AT NOMINAL VOLTAGE Max. Contact Drop at 10 Amps — INITIAL 0.100 VOLTS

End of Life — 0.125 VOLTS

Coil Data

Coil	Nominal	Frea.	DC Res.	Over Temperature Range		
Code	Voltages	Hz	AC Amps (B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)
1	6	DC	20 Ω	4.5	0.3	2.5
2	12	DC	80 Ω	9.0	0.75	4.5
3	28	DC	320 Ω	18.0	1.5	7.0
4 (A)	28	DC	320Ω	18.0	1.5	7.0
5	48	DC	920 Ω	32.0	2.5	14.0
6	28	400Hz	180 mA	22.0	1.25	10.0
7	28	50/400Hz	100 mA	22.0	1.25	10.0
8	115	400 Hz	40 mA	90.0	5.0	40.0
9	115	50/400 Hz	30 mA	95.0	5.0	40.0

A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.

B. DC COIL RESISTANCE \pm 10% AT 25 °C; AC COIL MAX. CURRENT AT NOMINAL VOLTAGE. C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.

D. MAX. OVERVOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.


E. COILS AVAILABLE FOR OTHER VOLTAGES AND FOR AC 50/60HZ.

NOTE: Only DC Coil Models are QPL Approved.

^{*} Max. contact opening under vibration or shock 10 microseconds

FCA-210 Series, 10 Amperes, DPDT (Continued)

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches \pm .010 and (Millimeters \pm .25).

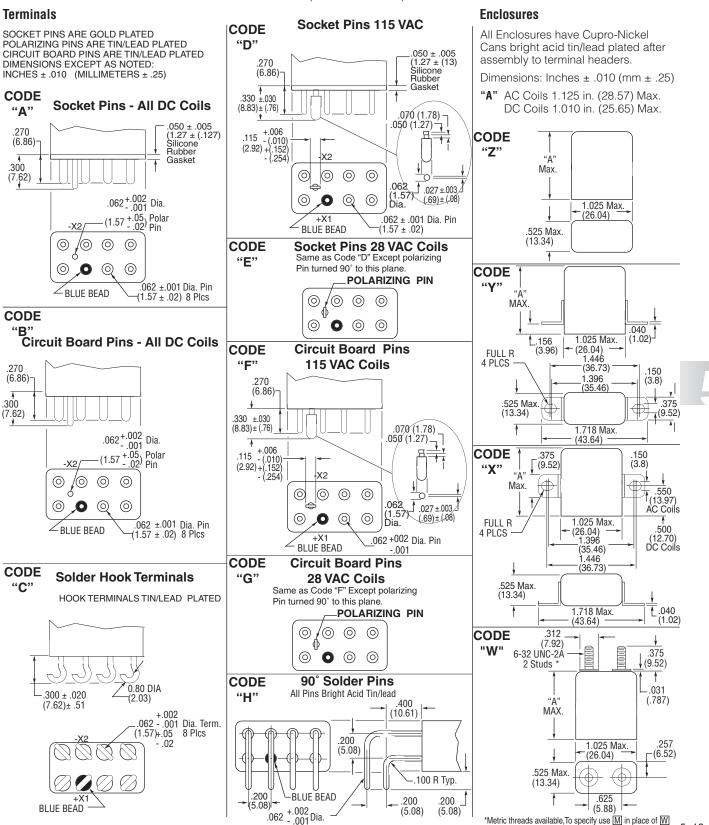


www.te.com



FCA-210 Series, 10 Amperes, DPDT (Continued)


Terminal Wiring

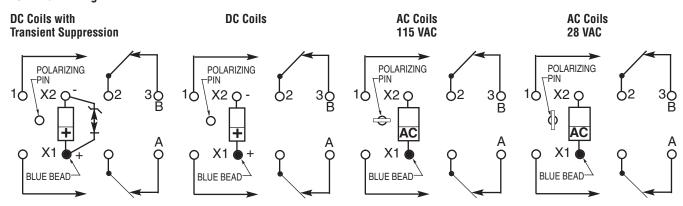

NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.



TERMINAL VIEW

HOW TO ORDER

FCA-215-FCA-210-A Y 4 **RELAY TYPE** -TERMINALS (Socket Pins, DC Coil) _____ **ENCLOSURE** (With Flanges) — COIL (28 VDC With Transient Suppression). —

NOTE: Only DC coil models are QPL Approved

www.te.com

^{*} The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.







The Series FCA-212 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state. This

results in appreciably increased contact pressure in both states over that of a spring return nonpolar design. We also manufacture other versions of this relay:

FCA-412 — 12 Amp 4PDT Relay

General Specifications

Temperature Rating — -70°C TO + 125°C

Altitude — 300,000 Feet

Shock* —

Z, Y, & X Enclosures — 200 g for 6 mS W & M Enclosures (Stud Mtg.) — 100 g for 6 mS

Vibration, Sinusoidal* —

Z, Y, & X Enclosures — 30 g 33-3000Hz W Enclosure — 20 g 33-3000Hz

Vibration, Random* —

Z, Y, & X Enclosures — 0.4 g²/Hz 50-2000Hz W & M Enclosures (Stud Mtg.) — 0.2 g²/Hz 50-2000Hz

Dielectric Strength -

At Sea Level -

All circuits to ground and circuit to circuit — 1250 V rms Coil to ground — 1000 V rms At 80,000 Feet — 350 V rms

Insulation Resistance -

Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests — 50 M Ω Min.

Operate Time at Nominal Voltage —

DC Relays — 10 ms or less AC Relays — 15 ms or less

Release Time at Nominal Voltage —

DC Relays — 10 ms or less AC Relays — 50 ms or less

Product Facts

- **■** Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- Permanent Magnet Drive
- Contacts Silver Cadmium Oxide with Gold Plating
- Coils for DC, 50 to 400Hz and 400Hz AC
- Weight 1.6 ounces max. (45.4 grams)

Contact Rating — Amperes Ratings Are Continuous Duty

Type of Load	Life (Min.)	28 VDC	115VAC	115/200VAC 3Ø	
Load	Cycles x 103	20 VDC	400Hz	400Hz	60Hz*
Resistive	100	12	12	12	2.5
Inductive	20	8	8	8	2.5
Motor	100	4	4	4	2.0
Lamp	100	2	2	2	1

^{*60} Hz loads rated for 10,000 operations

Overload Current — 40 AMPS DC, 60 AMPS 400Hz Rupture Current — 50 AMPS DC, 80 AMPS 400Hz

Max. Contact Drop at 12 Amps — INITIAL 0.150 VOLTS

End of Life — 0.175 VOLTS

Coil Data

Coil	Nominal Voltages	Frea.	DC Res.	Over Temperature Range			
Code		Hz	AC Amps (B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)	
1	6	DC	20 Ω	4.5	0.3	2.5	
2	12	DC	80 Ω	9.0	0.75	4.5	
3	28	DC	320Ω	18.0	1.5	7.0	
4 (A)	28	DC	320 Ω	18.0	1.5	7.0	
5	48	DC	920 Ω	32.0	2.5	14.0	
6	28	400Hz	180 mA	22.0	1.25	10.0	
7	28	50/400Hz	100 mA	22.0	1.25	10.0	
8	115	400 Hz	40 mA	90.0	5.0	40.0	
9	115	50/400 Hz	30 mA	95.0	5.0	40.0	


- A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.
- B. DC COIL RESISTANCE ± 10% AT 25°C; AC COIL MAX. CURRENT AT NOMINAL VOLTAGE.
- C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.
- D. MAX. OVERVOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.
- E. COILS AVAILABLE FOR OTHER VOLTAGES AND FOR AC 50/60HZ.

^{*} Max. contact opening under vibration or shock 10 microseconds



FCA-212 Series, 12 Amperes, DPDT (Continued)


Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches ± .010 and (Millimeters ± .25).

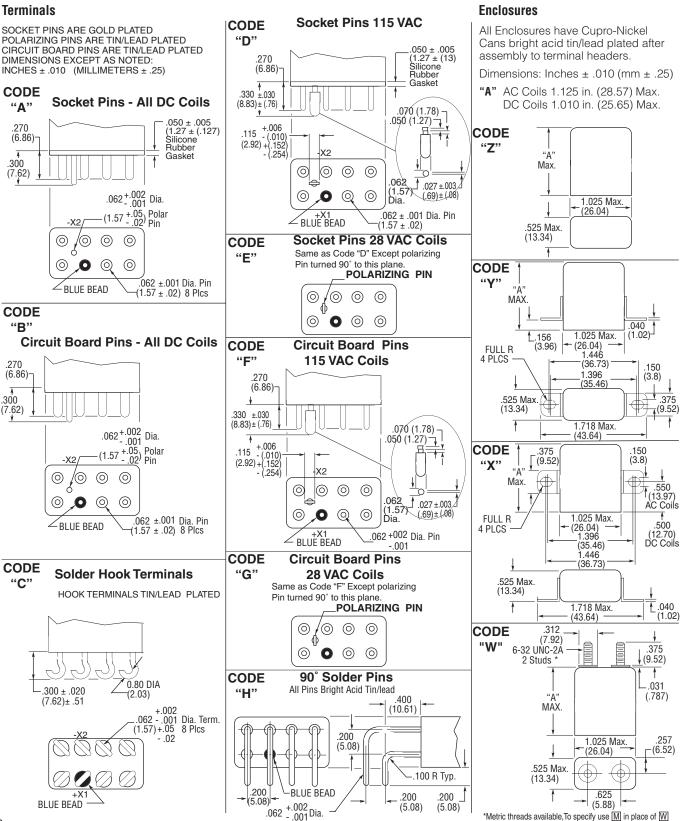



FCA-212 Series, 12 Amperes, DPDT (Continued)


Terminal Wiring

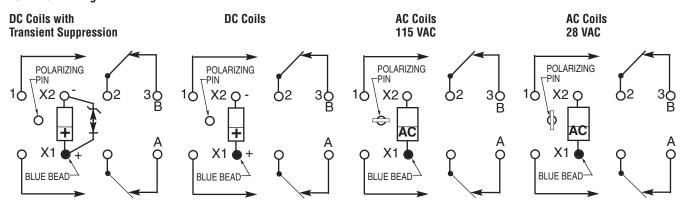

NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.



HOW TO ORDER

RELAY TYPE TERMINALS (Socket Pins, DC Coil) ENCLOSURE (With Flanges) COIL (28 VDC With Transient Suppression).



FCA-410 Series, 10 Amperes, 4PDT



Product Facts

- **■** Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- Permanent Magnet Drive
- 4PDT switching in one inch cube
- Contacts Silver Cadmium Oxide with Gold Plating
- Coils for DC and AC 50 to 400Hz or 400Hz
- Weight 2.72 ounces max. (77 grams max.)
- Qualified to M83536/15, /16

The Series FCA-410 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state.

This results in appreciably increased contact pressure in both states over that of a spring return nonpolar

design. We also manufacture 2-pole and 6-pole versions of this relay.

FCA-210 — 10 Amp DPDT Relay

FCA-610 — 10 Amp 6PDT Relay

Available

FCA-415 — 15 Amp 4PDT, Has the same specifications as the FCA-410 except is rated at 15 amps. (Commercial Only)

General Specifications Temperature Rating -

-70°C TO + 125°C

Altitude — 300,000 Feet

Shock* -

Z & Y Enclosures — 200 g for 6 mS W, X & M Enclosures -100 g for 6 mS

Vibration, Sinusoidal* —

Z & Y Enclosures 0.12 DA 10 to 70Hz 30 g 70 to 3000Hz W, X & M Enclosures — 0.12 DA 10 to 57Hz 20 g 57 to 3000Hz

Vibration, Random* —

Z & Y Enclosures 0.4 g²/Hz 50-2000Hz W, X & M Enclosures — 0.2 g²/Hz 50-2000Hz

Dielectric Strength -

At Sea Level -

All circuits to ground and circuit to circuit - 1250 V rms Coil to ground — 1000 V rms At 80,000 Feet — 350 V rms

Insulation Resistance -

Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests - $50 \text{ M}\Omega \text{ Min.}$

Operate Time at Nominal Voltage

DC Relays — 15 ms or less AC Relays — 20 ms or less

Release Time at Nominal Voltage -

DC Relays — 15 ms or less AC Relays - 50 ms or less

Contact Rating — Amperes Ratings Are Continuous Duty

Type of	Life (Min.)	28 VDC	120VAC	120/20	0VAC
Load	Cycles x 103	20 VDC	400Hz	400Hz-3Ø	60Hz-3Ø*
Resistive	100	10	10	10	2.5
Inductive	20	8	8	8	2.5
Motor	100	4	4	4	2.0
Lamp	100	2	2	2	1.0

^{*60} Hz loads rated for 10,000 operations

Overload Current — 40 AMPS DC, 60 AMPS 400Hz Rupture Current — 50 AMPS DC, 80 AMPS 400Hz

Contact Make Bounce — 1 MILLISECOND AT NOMINAL VOLTAGE Max. Contact Drop at 10 Amps — INITIAL 0.100 VOLTS

End of Life - 0.125 VOLTS

Coil Data

Coil	Nominal	Frea.	DC Res.	Ove	er Temperature Ra	nge
Code	Voltages	Hz	AC Amps (B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)
1	6	DC	18 Ω	4.5	0.3	2.5
2	12	DC	70 Ω	9.0	0.75	4.5
3	28	DC	290 Ω	18.0	1.5	7.0
4 (A)	28	DC	290 Ω	18.0	1.5	7.0
5	48	DC	865 Ω	32.0	2.5	14.0
6	28	400Hz	225 mA	22.0	1.25	10.0
7	28	50/400Hz	120 mA	22.0	1.25	10.0
8	115	400 Hz	40 mA	90.0	5.0	40.0
9	115	50/400 Hz	30 mA	95.0	5.0	40.0

A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.

NOTE: Only DC Coil Models are QPL Approved.

www.te.com

^{*} Max. contact opening under vibration or shock 10 microseconds

B. DC COIL RESISTANCE ± 10% AT 25°C; AC COIL MAX. CURRENT AT NOMINAL VOLTAGE.

C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN. D. MAX. OVER-VOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.

E. COILS AVAILABLE FOR OTHER VOLTAGES AND FOR AC 50/60HZ.


Below are shown the standard terminal types and the enclosures available. Note that the pin configuration for coil connections is determined by the coil supply voltage. Specify the assembly as indicated under How To Order. Dimensions are shown in inches ± .010 and (Millimeters ± .25) except as noted.

Terminals

Terminals on 0.200 centers. Coil terminals: X1-X2. Socket Pins are Gold Plated.


Circuit Board Pins are Tin/Lead Plated.

CODE "A" **Socket Pins-All DC Coils**




CODE "D"


Socket Pins-115 VAC Coils

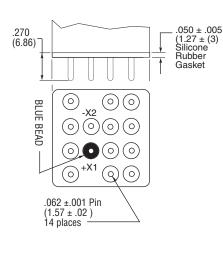


Enclosures

All Enclosures have cupro-Nickel cans bright acid tin/lead plated after assembly to terminal headers.








"W" (7.92)6-32 UNC-2A 375 (9.52) 3 Studs -.031 1.00 (.787)(25.4)1.015 (25.78).687 (17.44).343 (8.71).160 (4.06)1.051 .687 (25.79)(17.44)

.160

*Metric threads available,To specify use M in place of W

CODE "B" Circuit Board Pins-All DC Coils





SEE NEXT PAGE

FOR MORE COIL

TERMINAL OPTIONS

CODE "C" Solder Hooks-AC or DC Coils






www.te.com

(4.06)



FCA-410 Series, 10 Amperes, 4PDT (Continued)

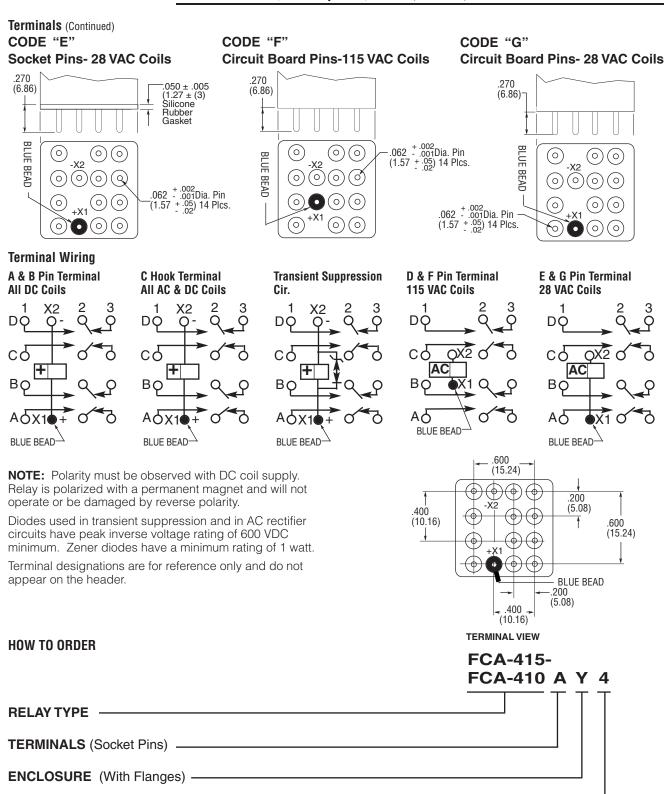

* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

www.te.com

to change.

COIL (28 VDC With Transient Suppression). ——NOTE: Only DC coil models are QPL Approved







Product Facts

- **■** Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- Permanent Magnet Drive
- Contacts Silver Cadmium **Oxide with Gold Plating**
- Coils for DC, 50 to 400Hz and 400Hz AC
- Weight 1.6 ounces max. (45.4 grams)
- Qualified to M6106/19, M83536/36, /37

The Series FCA-125 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state.

This results in appreciably increased contact pressure in both states over that of a spring return nonpolar design. We also manufacture other versions of this relay:

FCA-325 — 25 Ampere 3PDT Relay

FCAC-325 — 25 Ampere 3PST-NO Relay with 2 amp SPDT auxiliary

Contact Rating — Amperes Ratings Are Continuous Duty

•	Type of Load	Life (Min.) Cycles x 10 ³	28 VDC	115VAC 400Hz	115VAC 60Hz*
	Resistive	50	25	25	10
	Inductive	10	12	_	10
	Inductive	20	_	15	_
	Motor	50	10	10	8
	Lamp	50	5	5	_

^{*60} Hz loads rated for 10,000 operations

Overload Current — 50 AMPS DC, 80 AMPS 400Hz Rupture Current — 60 AMPS DC, 100 AMPS 400Hz Contact Make Bounce —1 MILLISECOND AT NOMINAL VOLTAGE Max. Contact Drop at 25 Amps — INITIAL 0.150 VOLTS End of Life — 0.175 VOLTS

General Specifications

Temperature Rating — -70°C TO + 125°C

Altitude — 300,000 Feet

Shock* -

Z. Y. & X Enclosures -200 g for 6 mS W & M Enclosures (Stud Mtg.) — 100 g for 6 mS

Vibration, Sinusoidal* —

Z, Y, & X Enclosures 30 g 33-3000Hz W & M Enclosures (Stud Mtg.) — 20 g 33-3000Hz

Vibration, Random* —

Z, Y, & X Enclosures -0.4 g²/Hz 50-2000Hz W & M Enclosures (Stud Mtg.) — 0.2 g²/Hz 50-2000Hz

Dielectric Strength -

At Sea Level -

All circuits to ground and circuit to circuit — 1250 V rms Coil to ground — 1000 V rms At 80.000 Feet - 350 V rms

Insulation Resistance -Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests $50 \text{ M}\Omega \text{ Min.}$

Operate Time at Nominal Voltage

DC Relays — 10 ms or less AC Relays — 15 ms or less

Release Time at Nominal Voltage -

DC Relays — 10 ms or less AC Relays — 50 ms or less

Coil Data

Coil	Nominal	F===	DC Res.	Ove	er Temperature Ra	nge
Code	Voltages	Freq. Hz	AC Amps (B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)
1	6	DC	20 Ω	4.5	0.3	2.5
2	12	DC	80 Ω	9.0	0.75	4.5
3	28	DC	320 Ω	18.0	1.5	7.0
4 (A)	28	DC	320 Ω	18.0	1.5	7.0
5	48	DC	920 Ω	32.0	2.5	14.0
6	28	400Hz	180 mA	22.0	1.25	10.0
7	28	50/400Hz	100 mA	22.0	1.25	10.0
8	115	400 Hz	40 mA	90.0	5.0	40.0
9	115	50/400 Hz	30 mA	95.0	5.0	40.0

- A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.
- B. DC COIL RESISTANCE ± 10% AT 25°C; AC COIL MAX. CURRENT AT NOMINAL VOLTAGE.
- D. MAX. OVERVOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.
- E. COILS AVAILABLE FOR OTHER VOLTAGES AND FOR AC 50/60HZ.

NOTE: Only DC Coil Models are QPL Approved.


^{*} Max. contact opening under vibration or shock 10 microseconds



FCA-125 Series, 25 Amperes, SPDT (Continued)

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches ± .010 and (Millimeters ± .25).

Terminals

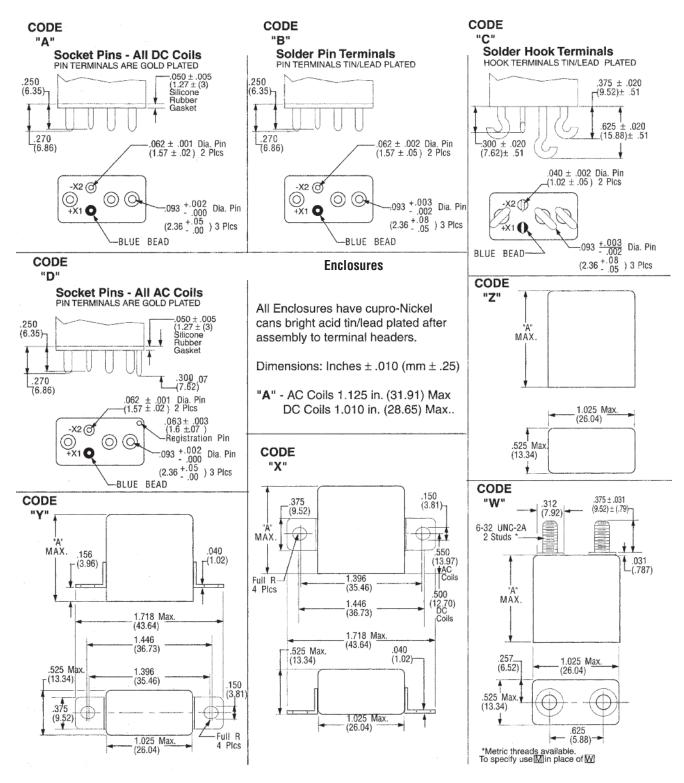


CII Mid-Range Relays




FCA-125 Series, 25 Amperes, SPDT (Continued)

Terminal Wiring


DC COILS



DC COILS WITH TRANSIENT SUPPRESSION




AC COILS



NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.

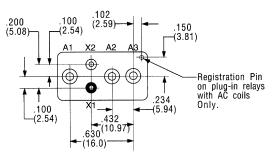

TERMINAL VIEW

HOW TO ORDER

RELAY TYPE

TERMINALS (Socket Pins, DC Coil)

ENCLOSURE (With Flanges)

COIL (28 VDC With Transient Suppression).

NOTE: Only DC coil models are QPL Approved

^{*} The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

in the operated state.



FCA-325 Series, 25 Amperes, 3PDT



Product Facts

- Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- Permanent Magnet Drive
- Contacts Silver Cadmium Oxide with Gold Plating
- Coils for DC, 50 to 400Hz and 400Hz AC
- Weight 2.89 ounces max. (82 grams)
- Qualified to M83536/32, /33

The Series FCA-325 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux

This results in appreciably increased contact pressure in both states over that of a spring return nonpolar design. We also manufacture other versions of this relay:

FCA-125 - 25 Amp SPDT Relay

FCAC-325 — 25 Ampere 3PST-NO Relay with 2 amp SPDT auxiliary

Contact Rating — Amperes Ratings Are Continuous Duty

Type of	Life (Min.)	28 VDC	115VAC	115/20	0VAC
Load	Cycles x 103	20 VDC	400Hz	400Hz-3Ø	60Hz-3Ø*
Resistive	50	25	25	25	2.5
Inductive	10	12	_	_	2.5
Inductive	20	_	15	15	_
Motor	50	10	10	10	2.0
Lamp	50	5	5	5	1.0

^{*60} Hz loads rated for 10,000 operations

Overload Current — 50 AMPS DC, 80 AMPS 400Hz

Rupture Current — 60 AMPS DC, 100 AMPS 400Hz

Contact Make Bounce —1 MILLISECOND AT NOMINAL VOLTAGE

Max. Contact Drop at 25 Amps — INITIAL 0.150 VOLTS

End of Life — 0.175 VOLTS

General Specifications

Temperature Rating — -70°C TO + 125°C

Altitude — 300,000 Feet

Shock* —

Z, Y, & V Enclosures — 200 g for 6 mS W, X & M Enclosures — 100 g for 6 mS

Vibration, Sinusoidal* —

Z, Y, & V Enclosures — 30 g 33-3000Hz W, X & M Enclosures — 20 g 33-3000Hz

Vibration, Random* —

Z, Y, & V Enclosures — 0.4 g²/Hz 50-2000Hz W, X & M Enclosures — 0.2 g²/Hz 50-2000Hz

Dielectric Strength -

At Sea Level -

All circuits to ground and circuit to circuit — 1250 V rms Coil to ground — 1000 V rms At 80,000 Feet — 350 V rms

Insulation Resistance —

Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests — 50 M Ω Min.

Operate Time at Nominal Voltage —

DC Relays — 15 ms or less

AC Relays — 20 ms or less

Release Time at Nominal Voltage —

DC Relays — 15 ms or less AC Relays — 50 ms or less

Coil Data

Coil	Nominal	Eroa	DC Res.	Ove	er Temperature Ra	nge
Code	Voltages	Freq. Hz	AC Amps (B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)
1	6	DC	18 Ω	4.5	0.3	2.5
2	12	DC	70 Ω	9.0	0.75	4.5
3	28	DC	290 Ω	18.0	1.5	7.0
4 (A)	28	DC	290 Ω	18.0	1.5	7.0
5	48	DC	865 Ω	32.0	2.5	14.0
6	28	400Hz	225 mA	22.0	1.25	10.0
7	28	50/400Hz	120 mA	22.0	1.25	10.0
8	115	400 Hz	40 mA	90.0	5.0	40.0
9	115	50/400 Hz	30 mA	95.0	5.0	40.0

- A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.
- B. DC COIL RESISTANCE \pm 10% AT 25°C; AC COIL MAX. CURRENT AT NOMINAL VOLTAGE.
- C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.
 D. MAX. OVER-VOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.
- E. COILS AVAILABLE FOR OTHER VOLTAGES AND FOR AC 50/60HZ.

NOTE: Only DC Coil Models are QPL Approved.

^{*} Max. contact opening under vibration or shock 10 microseconds

FCA-325 Series, 25 Amperes, 3PDT (Continued)

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches \pm .010 and (Millimeters \pm .25).

Terminals CODE CODE CODE "A" "C" "B" **Socket Pins - All DC Coils Solder Pin Terminals Solder Hook Terminals** PIN TERMINALS ARE GOLD PLATED PIN TERMINALS TIN/LEAD PLATED HOOK TERMINALS TIN/LEAD PLATED .050 ± .005 (1.27 ± (.12) Silicone .250 .250 .375 ± .020 (6.35)(6.35)(9.52 ± .508) Rubber Gasket .625 ± .020 $(15.88 \pm .51)$.270 ..062 ± .001 Dia. Pin (1.57 ± .02) 2 Plcs .270 .062 ± .001Dia. Pin (1.57 ± .02) 2 Plcs .300 ± .020 (7.62 ± .51) (6.86)(6.86)-.040 ± .002 Dia. Pin (1.02 ± .05) 2 Plcs \bigcirc (0)(0)(O)0 0 \bigcirc (0)0 \bigcirc .093 ^{+.002}Dia. Pin -.093 +.002 Dia. Pin (2.36 ^{+.05}_{-.00}) 9 Plcs (0)(2.36 + 0.05) 9 Plcs - BLUE BEAD **BLUE BEAD** CODE .093 ± .003 Dia.Pin (2.36 ±.08) 9 Plcs **Enclosures** 150 Typ. BLUE BEAD-"V" CODE All Enclosures have cupro-Nickel cans "Z" bright acid tin/lead plated after assembly 1.015 1.00 (2.54) .625 .937 15.88 23.80 (25.79) to terminal headers. Dimensions: Inches ± .010 (mm ± .25) 1.015 For socket pin terminals: specify 1.015 (25.79) 1.396 "Y" enclosures with DC coils and (25.79) FULL R "V" enclosures with AC coils. 6 PLCS (35.46)1.446 (36.73) 1.015 (25.79)1.00 (25.4) CODE CODE "X" "W" 040 .150 typ. (3.8) 1.718 Max. (1.02).312 (7.92) (43.64).156 (3.96).375 (9.52) 6-32 UNC-2A CODE 3 Studs .150 typ. –(3.8) 1 00 .625 .937 15.88 23.80 "Y" (25.4).047 1.00 (1.20)(25.4)1.015 1.015 .625 .937 15.88 23.80 (25.79) _1.396 (25.79)FULL R (35.46) 6 PLCS 1.015 1.446 1.015 .312 7.92 (25.78)(36.73).687 (17.44) FULL R (25.79)6 PLCS 1.396 343 (35.46)(8.71).160 1.446 1.015 (4.06)(36.73)(25.79)1.015 687 (25.79)(17.44) 1.718 Max. 1.00 (25.4)(43.64).160 .040 (4.06)1.718 Max. (1.02).156` (3.96) *Metric threads available,To specify use M in place of W (43.64)

Catalog 5-1773450-5 Revised 3-13

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in millimeters unless otherwise specified.

USA: +1 800 522 6752 Asia Pacific: +86 0 400 820 6015 UK: +44 800 267 666


For additional support numbers please visit www.te.com




FCA-325 Series, 25 Amperes, 3PDT (Continued)

Terminal Wiring


DC Coils



DC Coils with **Transient Suppression**








NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.

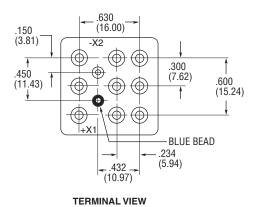

HOW TO ORDER

FCA-325-A Y 4 **RELAY TYPE** -TERMINALS (Socket Pins, DC Coil) _____ **ENCLOSURE** (With Flanges) -COIL (28 VDC With Transient Suppression). -

NOTE: Only DC coil models are QPL Approved

* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

www.te.com







Product Facts

- **■** Hermetically Sealed
- All Welded Construction
- **■** Balanced Force
- Permanent Magnet Drive
- Contacts Silver Cadmium **Oxide with Gold Plating**
- Coils for DC, 50 to 400Hz and 400Hz AC
- Weight 2.89 ounces max. (82grams)

The Series FCAC-325 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state. This results in appreciably increased contact pressure

in both states over that of a spring return nonpolar design. We also manufacture other versions of this relay:

FCA-125 — 25 Ampere SPDT Relay

FCA-325 — 25 Ampere 3PDT Relay

General Specifications Temperature Rating —

-70°C TO + 125°C

Altitude — 300,000 Feet

Shock* -

Z. Y. & V Enclosures — 200 g for 6 mS W, X & M Enclosures -100 g for 6 mS

Vibration, Sinusoidal* —

Z, Y, & VEnclosures 30 g 33-3000Hz W, X & M Enclosures — 20 g 33-3000Hz

Vibration, Random* —

Z, Y, & V Enclosures -0.4 g²/Hz 50-2000Hz W, X & M Enclosures 0.2 g²/Hz 50-2000Hz

Dielectric Strength -

At Sea Level -

All circuits to ground and circuit to circuit — 1250 V rms Coil to ground — 1000 V rms At 80.000 Feet - 350 V rms

Insulation Resistance -

Initial (500 VDC) — 100 M Ω Min. After Life or Environmental Tests $50 \text{ M}\Omega \text{ Min.}$

Operate Time at Nominal Voltage

DC Relays — 15 ms or less AC Relays — 10 ms or less

Release Time at Nominal Voltage -

DC Relays — 15 ms or less AC Relays — 50 ms or less

* Max. contact opening under vibration or shock 10 microseconds

Contact Rating — Amperes **Ratings Are Continuous Duty**

Type of	Life (Min.) Cycles	28 V	/DC	115V 400			115/200VAC
Load	х́10³	Main	Aux.	Main	Aux.	400Hz-3Ø	60Hz-3Ø*
Resistive	50	25	2	25	2	25	2.5
Inductive	10	12	1	_	_	_	2.5
Inductive	20	_	_	15	1	15	_
Motor	50	10	_	10	_	10	2.0
Lamp	50	5	.5	5	.5	.5	1.0

^{*60} Hz loads rated for 10,000 operations

Overload Current — 50 AMPS DC, 80 AMPS 400Hz Rupture Current — 60 AMPS DC, 100 AMPS 400Hz Contact Make Bounce — 1 MILLISECOND AT NOMINAL VOLTAGE Auxiliary Contact Bounce — 4 MILLISECONDS MAX. Max. Contact Drop at 25 Amps — INITIAL 0.150 VOLTS End of Life - 0.175 VOLTS

Coil Data

Coil	Nominal	Frea.	DC Res.	Ove	er Temperature Ra	nge
Code	Voltages	Hz	AC Amps (B)	Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)
1	6	DC	18 Ω	4.5	0.3	2.5
2	12	DC	70 Ω	9.0	0.75	4.5
3	28	DC	290 Ω	18.0	1.5	7.0
4 (A)	28	DC	290 Ω	18.0	1.5	7.0
5	48	DC	865 Ω	32.0	2.5	14.0
6	28	400Hz	225 mA	22.0	1.25	10.0
7	28	50/400Hz	120 mA	22.0	1.25	10.0
8	115	400 Hz	40 mA	90.0	5.0	40.0
9	115	50/400 Hz	30 mA	95.0	5.0	40.0

- A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.

- B. DC COIL RESISTANCE ± 10% AT 25°C; AC COIL MAX. CURRENT AT NOMINAL VOLTAGE.
 C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.
 D. MAX. OVERVOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.
- E. COILS AVAILABLE FOR OTHER VOLTAGES AND FOR AC 50/60HZ.



FCAC-325 Series (Continued)

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches ± .010 and (Millimeters ± .25).

Terminals

CODE

1.015

(25.79)


1.00 (25.4)

FULL R

6 PLCS

.150 typ. –(3.8)






1.015 (25.79) 1.396

(35.46) 1.446 (36.73)

.625 .937 15.88 23.80

*

CODE "B" Solder Pin Terminals Pin Terminals are Tin/Lead Plated




ENCLOSURES

All Enclosures have cupro-Nickel cans bright acid tin/lead plated after assembly to terminal headers.

Dimensions: Inches ± .010 (mm ± .25)

For socket pin terminals: specify "Y" enclosures with DC coils and

-BLUE BEAD



1.015 (25.79)

CODE "C"

Plated

-.300 ± .020 (7.62)± .51

Solder Hook Terminals

Hook Terminals are Tin/Lead

.375 ± .020 (9.52)± .51

.625 ± .020


_(15.88)± .51


-040 ± .002Dia. Pin


(1.02 ± .05) 2 Plcs

093 ± .003 Dia.Pin

"V" enclosures with AC coils.

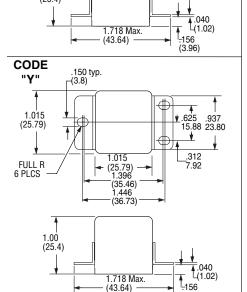

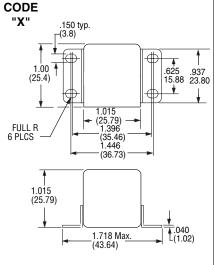

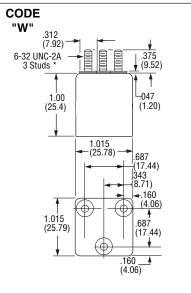


*Metric threads available, To specify use M in place of W


www.te.com




FCAC-325 Series (Continued)

Terminal Wiring








NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.



TERMINAL VIEW

HOW TO ORDER

RELAY TYPE TERMINALS (Socket Pins, DC Coil) ENCLOSURE (With Flanges and DC Coil) COIL (28 VDC With Transient Suppression)




FCA-150 Series, 50 Amps, 1PST/NO (DM) Relay

Product Facts

- Non-latching relay
- Balanced force design
- **■** Corrosion protected metal enclosure
- All welded hermetically sealed enclosure occupies about 1 in3 (16.4 cm3)
- 1 Form X (SPST-NO-DM)
- 6, 12 and 28 Vdc coils
- Weight: 90 grams
- Designed and built in accordance to MIL-PRF-6106





The FCA-150 series relay is a polarized, single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined

with the coil flux in the operated state. This results in appreciably increased contact pressure in both states over that of a spring return non-polar design.

1 Form X (SPST-NO-DM) configuration with main contacts rated 50 Amps.

Specifications

Contact Data				
Contact Form		1 Form >	((SPST-NO-DM)	
Contact Rating in Amps (Continuous Duty)				
	Type of	Life (Min.)		
	Load	Cycles	28 Vdc	
	Resistive	50,000	50	
	Inductive (L/R=5ms)	20,000	20	
	Motor	20,000	20	
	None	100,000	-	
Overload Current (Resistive)		200	A, 50 cycles	
Max. Contact Drop at 10A		Initial 30m	V; After Life 175mV	
Operate Time at Nominal Voltage			15ms	
Release Time			15ms	
Bounce Time			1ms	
Coil Data				
Coil Code	1	2	3	4
Nominal Operating Voltage (Vdc)	6	12	28	28
Maximum Operating Voltage (Vdc)	7.3	14.5	29	29
Maximum Pick-Up Voltage at +125°C	4.5	9	18	18
Maximum Pick-Up Voltage at +125°C, continuous current t	est (Vdc) 5.7	11.25	22.5	22.5
Drop-Out Voltage at OTR	0.3 - 2.5	0.75 - 4.5	1.5 - 7.0	1.5 - 7.0
Maximum Coil Current at +25°C (A)	.50	.26	.15	.15
Back EMF Suppressed to (Vdc) (Max)	N/A	N/A	N/A	-42
Coil Resistance ±10%	18Ω	70Ω	290Ω	290Ω



FCA-150 Series, 50 Amps, 1PST/NO (DM) Relay (Continued)

Specifications

opounications	
Electrical Data	
Initial Insulation Resistance (note 1)	100 megohms, minimum, at 500Vdc, between each pin and case
Insulation Resistance After Life or Environmental Test (note 1)	50 megohms, minimum, at 500Vdc, between each pin and case
Dielectric Strength At Sea Level	
Contacts to Ground and Between Contacts	1,250Vrms, 60 Hz.
Coil to Ground	1,000Vrms, 60 Hz.
Dielectric Strength at 80,000 ft (25,000m), All Points (note 4)	500Vrms, 60 Hz
Environmental Data	
Ambient Temperature Range, Operating	-70°C to +125°C
Altitude	300,000 feet
Shock Resistance	50 G's, 11 ms.
Vibration Resistance, Sinusoidal	20 G's, 75-3000Hz.
Mechanical Data	
Approximate Weight	3.2 oz. (90g) Max.


NOTES


1. All wired terminals must be connected together during this test. Dielectric withstanding voltage and insulation resistance are measured between all mutually insulated wired terminals and between all these terminals and case.

Terminals


CODE "B" Solder Pin Terminals


Tin/Lead Plated






CODE "C" Solder Hook Terminals Tin/Lead Plated





CODE "K" Terminal Shield

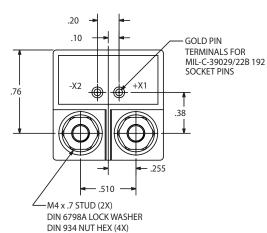





FCA-150 Series, 50 Amps, 1PST/NO (DM) Relay (Continued)

Outline Dimensions

The standard terminal types and enclosures are illustrated below with dimensions in inches ± 0.010 and (millimeters ±0.25).

Enclosures

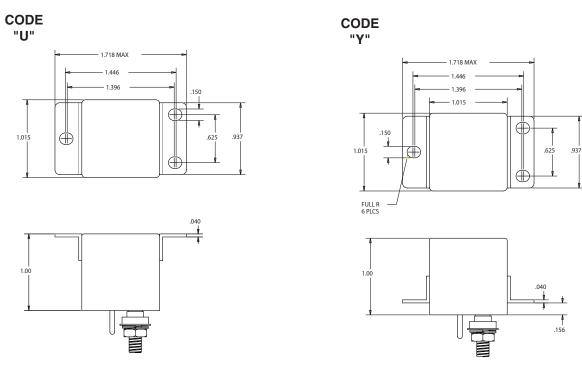

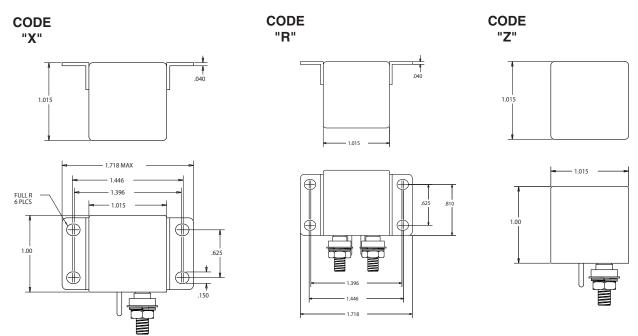





FCA-150 Series, 50 Amps, 1PST/NO (DM) Relay (Continued)

Terminal Wiring

DC Coils




DC Coils with Transient Suppression




NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.



How to Order

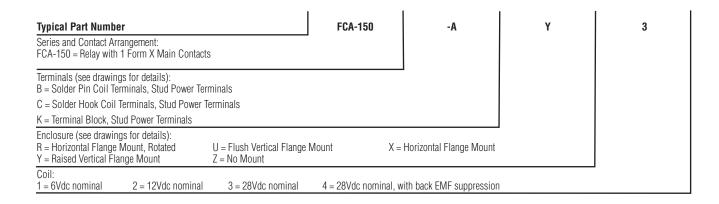

www.te.com




FCA-150NC Series, 50 Amps, 1PST/NC (DB) Relay

Product Facts

- Non latching hermetically sealed relay
- Balanced force design
- Hermetically sealed, corrosion protected metal can
- All welded construction
- 6, 12 and 28Vdc coils available.
- **■** Weight 90 grams
- Designed and built in accordance to MIL-PRF-6106





Specifications

Specifications					
General Characteristics					
Temperature range			-70° C to +125° C		
Altitude			300,000 feet		
Dielectric strength at sea level					
 Contacts to ground and between contacts 			1250 Vrms / 60 Hz		
- Coil to ground			1000 Vrms / 60 Hz		
Dielectric strength at altitude 25000 m (80,000 ft) (all point	ts)		500 Vrms / 60 Hz		
Initial insulation resistance at 500 Vdc			100 M Ω min.		
Initial insulation after life or environmental test			50 M Ω min.		
Sinusoidal vibration	20g / 75 to 3000 Hz				
Shock	ock 50g / 11 ms				
Operate time at nominal voltage			15 ms max.		
Release time	ne 15 ms max.				
Bounce time			1 ms max.		
Contact voltage drop at nominal current					
-initial value			150 mV max.		
-after life			175 mV max.		
Coil Data					
Coil Code	1	2	3	4(A)	
Nominal Operating Voltage (Vdc)	6	12	28	28	
Maximum Operating Voltage (Vdc)	7.3	14.5	29	29	
Maximum Pick-Up Voltage at +125°C	4.5	9	18	18	
Maximum Pick-Up Voltage at +125°C, continuous current to	est (Vdc) 5.7	11.25	22.5	22.5	
Drop-Out Voltage at OTR	0.3 - 2.5	0.75 - 4.5	1.5 - 7.0	1.5 – 7.0	
Maximum Coil Current at +25°C (mA)	.50	.26	.15	.15	
Back EMF Suppressed to (Vdc)	N/A	N/A	N/A	-42	
Coil Resistance	18Ω	70Ω	290Ω	290Ω	

For other coil voltages, consult factory.



FCA-150NC Series, 50 Amps, 1PST/NC (DB) Relay (Continued)


Contact Electrical Characteristics


Contact Type	Rated Current	Rated Voltage
Main Contact	50A	28Vdc
Minimum Operating cycles	Contact rating per pole and load type MAIN Contact	Load Currents in Amps
50,000 cycles	Resistive load	50
20,000 cycles	Inductive load (L/R=5ms)	20
20,000 cycles	Motor load	20
50 cycles	Resistive overload	200
100,000 cycles	No Load	

All endurance ratings are subject to validation - consult factory


Terminals


CODE "B" Solder Pin Terminals Tin/Lead Plated






CODE "C" Solder Hook Terminals Tin/Lead Plated





CODE "K" Terminal Shield

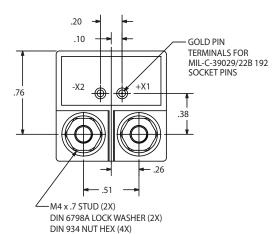

www.te.com




FCA-150NC Series, 50 Amps, 1PST/NC (DB) Relay (Continued)

Outline Dimensions

The standard terminal types and enclosures are illustrated below with dimensions in inches ± 0.010 and (millimeters ±0.25).

Enclosures

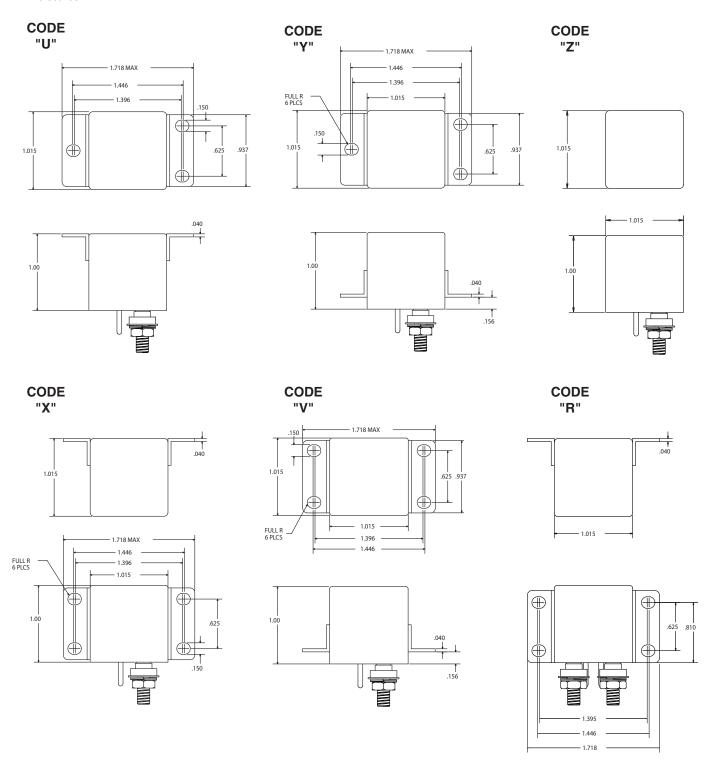





FCA-150NC Series, 50 Amps, 1PST/NC (DB) Relay (Continued)

Terminal Wiring

DC Coils




DC Coils with Transient Suppression




NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.



PART NUMBERING SYSTEM

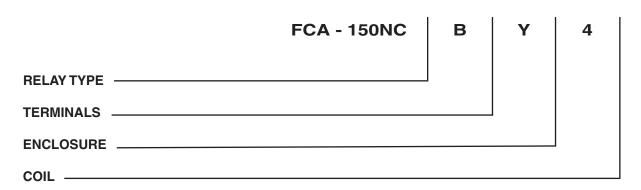





FCAC-150 Series, 50 Amps, 1PST/NO (DM) with 1PDT Auxiliary Contacts

Product Facts

- Non-latching relay
- Balanced force design
- **■** Corrosion protected metal enclosure
- All welded hermetically sealed enclosure occupies about 1 in3 (16.4 cm3)
- 1 Form C (SPDT) auxiliary contact
- 6, 12 and 28 Vdc coils
- Weight: 90 grams
- Designed and built in accordance to MIL-PRF-6106





The FCAC-150 series relay is a polarized, single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined

with the coil flux in the operated state. This results in appreciably increased contact pressure in both states over that of a spring return non-polar design.

A 1 form C (SPDT) auxiliary contact set rated 2 amps is available.

Specifications

opecinications						
Auxiliary Contact Data						
Contact Form	1 Form X (SPDT-NO-DM) with 1 Form C (SPDT) Auxiliary					
Contact Rating in Amps (Continuous Du	ity)					
	Type of	Life (Min.)		115 Vac		
	Load	Cycles	28 Vdc	400Hz		
	Resistive	50,000	50	50		
ıl	nductive (L/R=5ms)	20,000	20	20		
	Motor	20,000	20	20		
	None	100,000	-	_		
Coil Data						
Coil Code		1	2	3	4(A)	
Nominal Operating Voltage (Vdc)		6	12	28	28	
Maximum Operating Voltage (Vdc)		7.3	14.5	29	29	
Maximum Pick-Up Voltage at +125°C		4.5	9	18	18	
Maximum Pick-Up Voltage at +125°C, continuous current test (Vdc)		(Vdc) 5.7	11.25	22.5	22.5	
Drop-Out Voltage at OTR		0.3 – 2.5	0.75 - 4.5	1.5 - 7.0	1.5 - 7.0	
Maximum Coil Current at +25°C (mA)		.50	.26	.15	.15	
Back EMF Suppressed to (Vdc) (max)		N/A	N/A	N/A	-42	
Coil Resistance ±10%		18Ω	70Ω	290Ω	290Ω	



FCAC-150 Series, 50 Amps, 1PST/NO (DM) with 1PDT Auxiliary Contacts (Continued)

Specifications


opouniono			
Electrical Data			
Initial Insulation Resistance (note 1)	100 megohms, minimum, at 500Vdc, between each pin and case		
Insulation Resistance After Life or Environmental Test (note 1)	50 megohms, minimum, at 500Vdc, between each pin and case		
Dielectric Strength At Sea Level			
Contacts to Ground and Between Contacts	1,250Vrms, 60 Hz.		
Coil to Ground	1,000Vrms, 60 Hz.		
Dielectric Strength at 80,000 ft (25,000m), All Points (note 4)	500Vrms, 60 Hz		
Environmental Data			
Ambient Temperature Range, Operating	-70°C to +125°C		
Altitude	300,000 feet		
Shock Resistance	50 G's, 11 ms.		
Vibration Resistance, Sinusoidal	20 G's, 75-3000Hz.		
Mechanical Data			
Approximate Weight	3.2 oz. (90g) Max.		


NOTES

1. All wired terminals must be connected together during this test. Dielectric withstanding voltage and insulation resistance are measured between all mutually insulated wired terminals and between all these terminals and case.


Terminals


CODE "B" Solder Pin Terminals Tin/Lead Plated






CODE "C" Solder Hook Terminals Tin/Lead Plated





CODE "K" Terminal Shield



www.te.com





FCAC-150 Series, 50 Amps, 1PST/NO (DM) with 1PDT Auxiliary Contacts (Continued)


Outline Dimensions

The standard terminal types and enclosures are illustrated below with dimensions in inches ± 0.010 and (millimeters ±0.25).

Enclosures

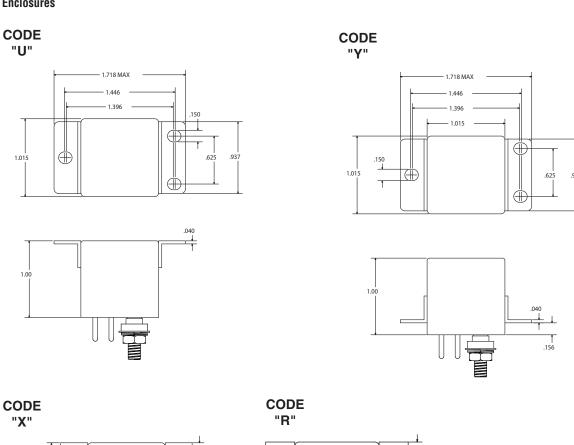

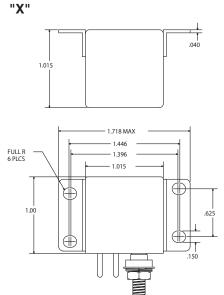

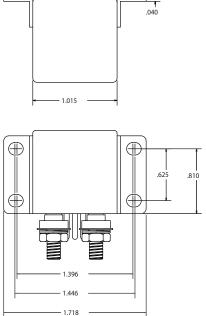


www.te.com



FCAC-150 Series, 50 Amps, 1PST/NO (DM) with 1PDT Auxiliary Contacts (Continued)

Terminal Wiring

DC Coils

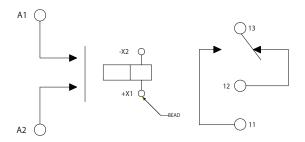



NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.


DC Coils with Transient Suppression

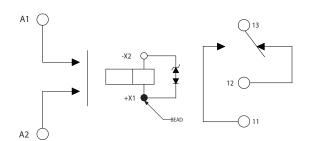

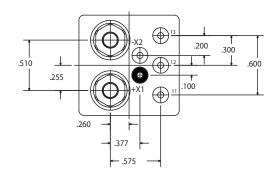

TERMINAL VIEW

How to Order

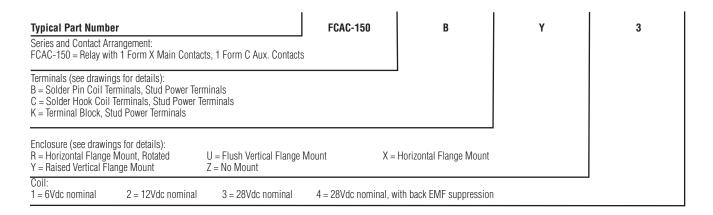



Selection and Application Guide

This selection and application guide is suggested practices from ARP (Aerospace Recommended Practice) 4005 Concerning proper performance of relays.

Caution:

The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay. Choosing the proper relay depends primarily on matching the relay to the load, power supply, and environment. Selection should be limited to items that meet the following requirements:

- **A. Contacts** must be rated for the load. Current rating, type of load (resistive, lamp, motor, inductive, and so forth), impedance range, voltage rating, DC or AC, frequency, single phase or polyphase, polyphase load balance, and type of switching or transfer should all be considered. Each of the following switching and transfer functions places a different requirement on each of the relay contacts and must be considered when selecting a relay with the proper contact rating:
 - (1) On-Off Switching DC, single phase or polyphase (2) Motor Reversing (AC or DC)

 - (3) Transferring load between phases of same source
 - (4) Transferring load between unsynchronized AC sources
- **Power supply characteristics** must be taken into account. Voltage regulation, variations in frequency, ripples and spikes, as well as steady state conditions, should be included. If more than one power supply is involved, not only must each be suitable but interaction between them also should be investigated.
- Coil (or coils) should be rated so as to have proper operation under all anticipated conditions.
- D. Consideration of environmental conditions anticipated throughout the service of life, as well as those expected during storage and transportation before installing the relays in equipment, is mandatory. Electrical parameters, environmental factors, mechanical stresses, and compatibility are among the categories for which the relay must be reviewed.
- The circuit in which the relay is used, the interlocking feature employed, the wiring harness, and the associated components should all be reviewed for assuring mutual suitability.
- Relays should be hard wired whenever possible, to avoid the need for additional contact points associated with the relay plug-in socket arrangement. (Plug-in types should be considered for quick turnaround times).
- G. To permit "safe" isolation of relay circuit in the OFF condition, and better eliminate an electrical shock hazard, an electromechanical switching device should be placed between the positive terminal of the power source and relay coil.

- **Proper transistor control** of the relay coil requires a stable |reference voltage. This can be done by connecting the plus side of the coil to the positive side of the power source, the minus side of the relay coil to the collector of an NPN transistor, the emitter of the transistor to the grounded side of the power source, and the transistor base to the control voltage. For example, see MIL-R-28776/1.
- Any switching device controlling the relay coil circuit must be capable of withstanding, without damage, the sum of the maximum coil circuitry voltage and the peak value of transient voltage that results when the coil circuit is opened; for example, a switch controlling a relay coil that is supplied with a 28V DC line and subjected to a transient voltage suppressed to 42V must be capable of withstanding 28V + 42V or a 70V surge without damage.
- In selecting solid state electronic switching devices to control relay coil circuits, care must be used in selecting a solid state device with a leakage current (in the "off state") that is sufficiently low to permit the relay to drop out.
- Control of the relay coil circuit by other than step-function switching may invalidate published relay performance properties such as pickup and dropout voltages, pickup, dropout, and bounce times.



Cross Reference - Socket to Relay

NOTE: TE Connectivity Does

Not Manufacture Relay Sockets.

This Socket to Relay cross reference is provided for additional design assistance. Several of TE Authorized Distributors carry relay sockets for your convenience. Relay sockets come with a variety of profiles, mounting styles, and mounting hardware options, so please contact the relay socket supplier of your choice or one of our **Authorized Distributors** who carry relay sockets for additional information.

01000 11010101100	Outlot to Holay	
Military Socket P/N M12883/40-01 M12883/40-05 M12883/40-07 M12883/40-11 M12883/40-13 M12883/40-17 M12883/40-19 M12883/40-23	M83536/15-022 M83536/16-006, 014, 031, 034	Relay Type 4 Pole, 10 Amp
M12883/40-02 M12883/40-08 M12883/40-14 M12883/40-20	FCA-410-DY8 (Catalog Version) FCA-410-DY9 (Catalog Version)	4 Pole, 10 Amp, AC
M12883/41-01 M12883/41-04 M12883/41-06 M12883/41-09 M12883/41-11 M12883/41-14 M12883/41-16 M12883/41-19	M83536/9-006, 015, 024, 035 M83536/10-006, 015, 024, 034, 038	2 Pole, 10 Amp
M12883/41-02 M12883/41-07 M12883/41-12 M12883/41-17	FCA-210-DY8 (Catalog Version) FCA-210-DY9 (Catalog Version)	2 Pole, 10 Amp, AC
M12883/44-01	M83536/5-006, 014, 022, 030 M83536/6-006, 014, 022, 032	4 Pole, 5 Amp
M12883/45-01	M83536/1-006, 015, 024, 033 M83536/2-006, 015, 024, 035	2 Pole, 5 Amp
M12883/47-01 M12883/47-04 M12883/47-07 M12883/47-10	FCA-610-AY3 (Catalog Version) FCA-610-AY4 (Catalog Version)	6 Pole, 10 Amp
M12883/47-02 M12883/47-05 M12883/47-08 M12883/47-11	FCA-610-DY8 (Catalog Version)	6 Pole, 10 Amp AC
M12883/48-01 M12883/48-02 M12883/48-03 M12883/48-04	M83536/32-003L M83536/33-003L	3 Pole, 25 Amp
M12883/48-05 M12883/48-06 M12883/48-07 M12883/48-08	FCA-325-AV8 (Catalog Version) FCA-325-AV9 (Catalog Version)	3 Pole, 25 Amp AC
M12883/52-01	M83536/2-028	2 Pole, 5 Amp Track Mount
M12883/52-02	M83536/6-025	4 Pole, 5 Amp Track Mount
M12883/55-01 M12883/55-02	M6106/19-004, 007, 012, 017, 022	1 Pole, 25 Amp



Engineering Notes

